



**Insulated Class A –
(Per ASTM E-84)
Waterproof
Designed for quick
1-step installation**

Now you can finish interior walls and ceilings and include insulation in one easy step. The PLAS-TEX® surface is permanently bonded to a fire resistant material with a polystyrene foam core with your selection of insulating values. The resultant lightweight panel is rigid and can be quickly and easily installed by one person.

The unique product design greatly reduces the flame spread and smoke and allows the product to pass E-84 Class A requirements. In some configurations the INSULEX-FR will pass the stringent NFPA 286 Room Corner Burn (UL 1715). The product can be attached directly to studs, pre-stressed concrete, cement block, existing walls, or inserted in suspended ceiling grids

INSULEX-FR Panels are fiberglass-free and 100% waterproof. Available with cracked-ice/pebbled, matte or smooth finish, bright white or almond, the panels are non-absorbent and will not rot or water-discolor. Walls can be easily maintained with a clean rag and cleaner.




Parkland Performance™
WALLS & CEILINGS



INSULEX & INSULEX-FR PANELS ARE **PRACTICAL, FUNCTIONAL AND VERSATILE.**

Anywhere you need a solid, sanitary, totally waterproof surface backed-up by custom specified installation qualities, INSULEX-FR Panels provide an effective, easy to install solution. Not only can you specify insulated panels that go up quickly over wood or metal studs, but you can also adapt INSULEX-FR Panels for use as ceiling tile or configure them into double-sided partitioning.

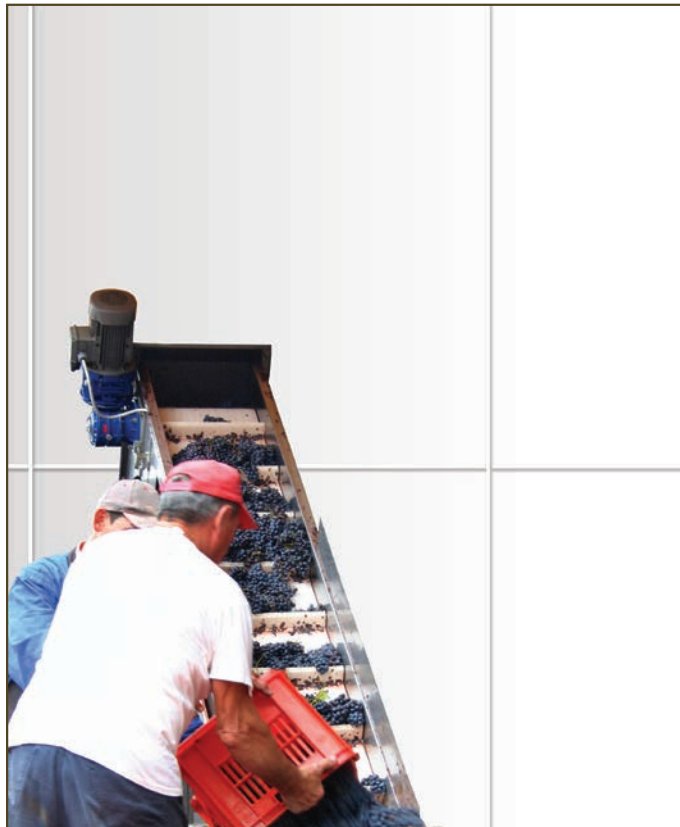

FEATURES

- R5-R15 insulation value
- Bridges cracks, grout lines and uneven walls
- Span 24" between studs
- Brightens surroundings
- Moisture resistant
- Fiberglass free
- Does not support mold, mildew, or bacteria growth
- Chemically inert laminate
- Some configurations pass Class A (Per ASTM E-84) and NFPA 286
- USDA compliant/CFIA approved

BENEFITS

- Reduce operation costs--no sweating
- Install directly over studs or purlings
- Save heating and cooling costs
- Reduce lighting costs
- Can use for ceilings and walls
- No swelling, rotting or water spots.
- No irritating, harmful fiberglass dust
- Not affected by harsh chemicals
- Ceiling panels can be taken down and scrubbed
- Install over existing walls or studs

PRODUCT RANGE*

Thicknesses: 1 to 3.5"
Widths: up to 4'
Lengths: up to 12'
In Stock: Varies

ACCESSORIES

Matched PVC moldings
Nylon rivets - 1" and up

COLORS

Bright White
Almond
Other colors are available
by special order.

TEXTURE

Cracked-Ice/Pebbled
Matte
Smooth
Stucco

*Some textures are special order.

Check local building codes for acceptability. Insulex-FR is available as Class A.


Parkland Performance™
WALLS & CEILINGS

P.O. Box 339, 104 Yoder Drive, Middlebury, IN 46540 • Toll Free: 800.835.4110 • Phone: 574.825.4336 • www.parklandplastics.com