



NRP-ULTRA takes durability to a new level!

More scratch resistant and scuff resistant than FRP panels, for 20 years the standard in sanitary sheet products, NRP-ULTRA has a Class A Fire Rating based on the ASTM E-84. Which makes it excellent for kitchens, healthcare applications of all kinds, and corridors in high occupancy buildings.

NRP-ULTRA offers many decorative options including embossed woodgrains and marbles, as well as solid color and decorative high gloss panels. It is completely waterproof and resists the growth of mold and mildew. It can be joined by welding or with decorative aluminum moldings, so there are no gaps between panels where dirt might accumulate undetected. Where durability and ease of cleaning are essential—without sacrificing style—NRP-ULTRA is the panel of choice.



# NRP-ULTRA—YOUR BEST CHOICE FOR DURABILITY, DESIGN AND VALUE



An outstanding sanitary panel at an outstanding price, NRP-Ultra surpasses the traditional panel options in both wear resistance and mar resistance. Join with matching moldings or weld the seams (white only). Panels are available with a smooth, glossy finish, or textured in plain colors or decorative patterns by special order. Available in 48" x 96" or 48" x 120" sheets or custom-cut into tiles, which may be pre-pasted.

## FEATURES & BENEFITS


- Easy to clean
- Resists scratching and marring
- White is NSF approved and weldable with Parkland Plastics Welding Rod
- Class A, per ASTM E84
- Resists the growth of mold and mildew
- Decorative
- Waterproof

## PRODUCT USES

- Kitchens
- Patient rooms
- Bathrooms and showers
- Wainscoting for corridors and classrooms
- Food preparation
- Lobbies
- Restaurant decor
- Feature walls

## PRODUCT SPECIFICATIONS

PROPERTY	ASTM TEST	RESULT
Water Absorption	ASTM D570	0.06%
Notched Izod Impact Resistance	ASTM D256	0.3133 ft. lbf/in.
Coefficient of Linear Thermal Expansion	ASTM D696	22.3 x 10 <sup>-6</sup> in/in/°F
Resistance to Growth of Mold/Mildew	ASTM D3273	Rated 10 - both sides
Flame Spread	ASTM E84	< 25 Class A
Smoke Developed Index	ASTM E84	< 450 Class A
Cleanability/Stain Test* *Reagents available on request	ASTM D1308	Stain Rating 24 (range 20-200)
Wear Index	ASTM D4060	0.060 typical

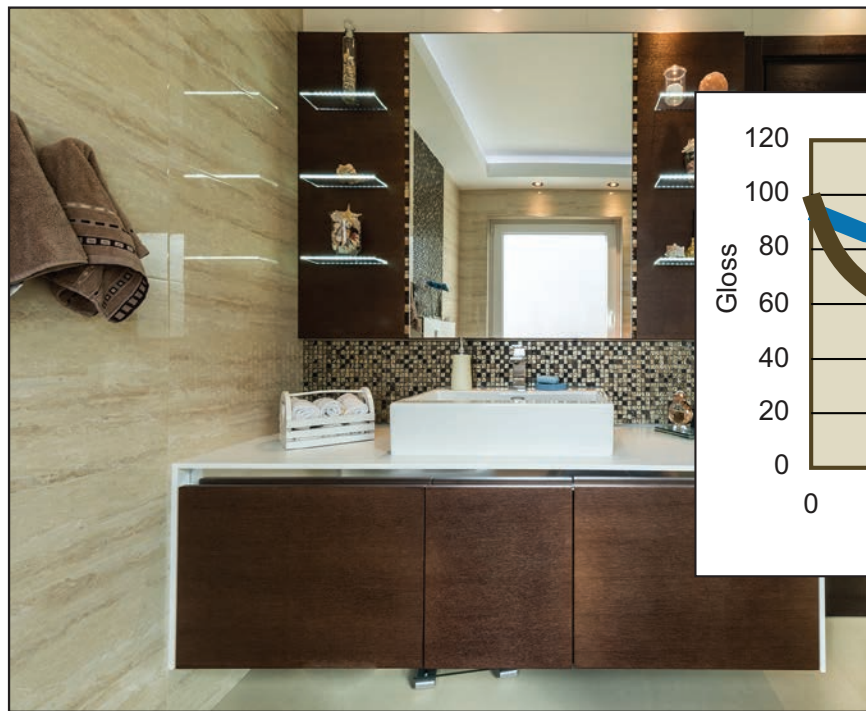

## MAR RESISTANCE - ASTM D6037

