



**Durable and
Insulated Wall Panels
for Demanding
Environments!**

**Available in Class A or Class C Fire
Ratings per the ASTM E-84**


Finish your walls and ceilings in no time at all! INSULEX Wall Panels are created by laminating a sheet of PLAS-TEX® over top of a layer of foam which gives you a solid durable insulating wall panel for the most demanding facilities. INSULEX-FR has a Class A Fire Rating, and standard INSULEX has a Class C Fire Rating (per the ASTM E-84). INSULEX Wall Panels are the perfect waterproof wall panel for any facility.

INSULEX is very light weight and can be used not only as a wall panel, but when cut into 2'x2' / 2'x4', as a ceiling tile in a suspended grid system. Available with pebbled texture, smooth, or matte in 4'x8', 4'x10' or 4'x12' sizes in either white or almond.


Attach directly to the studs, on top of pre-stressed concrete, cement block, or over existing walls to finish your walls quickly and easily. INSULEX and INSULEX-FR Panels are fiberglass-free and 100% waterproof!



Parkland Performance™
WALLS & CEILINGS

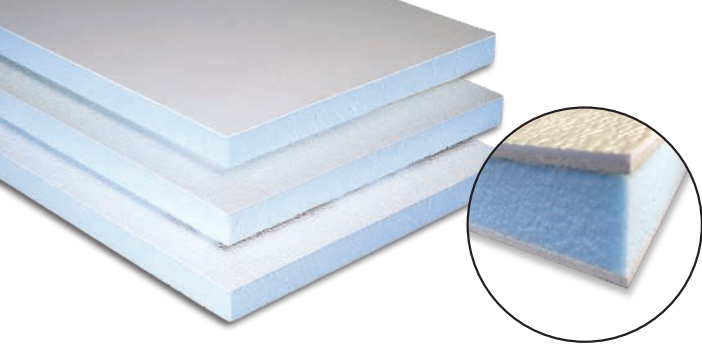

INSULEX & INSULEX-FR
PANELS ARE
**PRACTICAL, FUNCTIONAL
AND VERSATILE.**

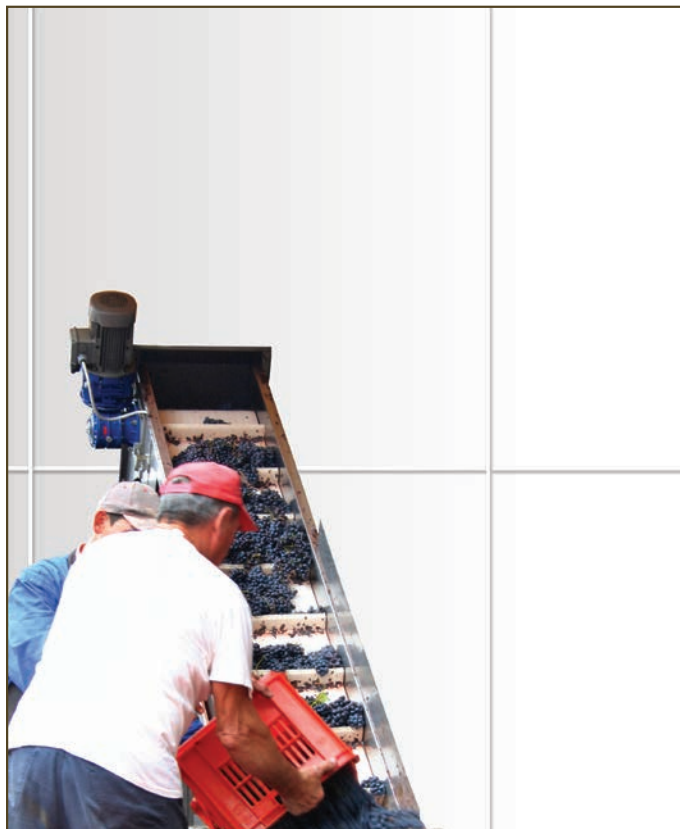

FEATURES

- R5-R15 insulation value
- Bridges cracks, grout lines and uneven walls
- Span 24" between studs
- Brightens surroundings
- Moisture resistant
- Fiberglass free
- Does not support mold, mildew, or bacteria growth
- Chemically inert laminate
- Some configurations pass Class A (Per ASTM E-84) and NFPA 286
- USDA compliant/CFIA approved

BENEFITS

- Reduce operation costs--no sweating
- Install directly over studs or purlings
- Save heating and cooling costs
- Reduce lighting costs
- Can use for ceilings and walls
- No swelling, rotting or water spots.
- No irritating, harmful fiberglass dust
- Not affected by harsh chemicals
- Ceiling panels can be taken down and scrubbed
- Install over existing walls or studs

PRODUCT RANGE*

Thicknesses: ½" + (depending on the R value / Fire Rating required)

Widths: up to 4'

Lengths: up to 12'

ACCESSORIES

Matched PVC moldings
Nylon rivets - 1" and up

COLORS

White
Almond
Other colors are available by special order.

TEXTURE

Cracked-Ice/Pebbled
Matte
Smooth
Stucco

* INSULEX & INSULEX-FR are special order products requiring minimum order quantities. To place an order or inquire if you can meet special order requirements, please call customer service at 1-800-835-4110.

Check local building codes for acceptability. INSULEX-FR is available as Class A.

